

BEZBEDNOŠNA TEHNOLOGIJA
ZA ZAŠTITU ŽIVOTNE SREDINE

SAFETY AND
ENVIRONMENTAL
TECHNOLOGY

E.L.B.
FÜLLSTANDSGERÄTE

06-01-05E

Uronjene Magnetne Sonde Tip T-208 PE, PPH, PVC

Immersible Magnetic Probes Type T-208 PE, PPH, PVC

Tehnicki podaci Tip T-208

Spoj	Vidite podatke kutije
Sistem zastite EN 60529	IP 65 kutija/utikac IP 55 kabl
Tip plovka	Max. 6x tip 11 (tip 15, 17)
Kabl	1000mm LiYY 0.5mm ² ili silikon 0.5mm ² max. 3 x promenljive veze, 5 x NO/NC
Duzina cevi	Max. 6000 mm Ojacana od 1000mm
Operativna temperatura	PVC: Max. 60°C PE: max. 80°C PP: max. 90°C
Operativni pritisak	Max. 6 bar
Gustina tecnosti	Tip 11: 0.60 g/cm ³ Tip 15: 0.59 g/cm ³ Tip 17: 0.63 g/cm ³
Broj veza	Max. 6x promenljiva veza Max. 7 x NO/5 x NC
Struja ukljucivanja	1A, 2A
Kapacitet ukljucivanja	Promenljiva veza: 60 W/VA NO: 100 W/VA NC: 60 W/VA
Minimalni razmak veza po broju plovaka	105mm

Technical Data Type T-208

Connector	see box data
System of protection EN 60529	IP 65 box / plug IP 55 cable
Float type	max. 6 x type 11 (type 15, 17)
Cable	1000 mm LiYY 0,5 mm ² or Silicone 0,5 mm ² max. 3 x change-over contacts, 5 x NO/NC
Pipe length	max. 6000 mm reinforced from 1000 mm
Operating temperature	PVC: max. 60 °C PE: max. 80 °C PP: max. 90 °C
Operating pressure	max. 6 bar
Media density	type 11: 0.60 g/cm ³ type 15: 0.59 g/cm ³ type 17: 0.63 g/cm ³
Number of contacts	max. 6 x change-over contacts max. 7 x NO / 5 x NC
Switching current	1 A, 2 A
Switching capacity	change-over contact: 60 W/VA NO: 100 W/VA NC: 60 W/VA
Minimum contact gap with a number of floats	105 mm

Kljuc tipa Tip T-208

Type Key Type T-208

Osnovne oznake (cevi Ø20mm) / Basic designation (pipe Ø 20 mm)

Materijal spoja cevi i zavrtnja / Material of pipe and screw union
PE = polietilen / Polyethylene
PP = polipropilen / Polypropylene
PV = polivinilhlorid / Polyvinylchloride

Navoj / Thread

I1" = G 1" za unutrašnju montažu / G 1" for internal assembly
A1" = G 1" za spoljašnju montažu / G 1" for external assembly
A2" = G 2" za spoljašnju montažu / G 2" for external assembly
A3" = G 3" za spoljašnju montažu / G 3" for external assembly

Dizajn / Design

bez indikacije / without indication = fiksni / fixed
V = podesiv (samo sa spoljašnjim navojem) / adjustable (only with external thread)

Dodatne trajne uronjene sonde /

Additional continuous immersible probes
bez indikacije / without indication = nema / none
K = trajne uronjene sonde / continuous immersible probes

Broj plovaka / No. of floats

1x = 1 plovak / 1 float
2x = 2 plovka itd. / 2 floats etc.

Modeli plovka / Float models



11 = cilindar, PE 78mmØ / cylinder PE 78 mm Ø
15 = cilindar, PP 78mmØ / cylinder PP 78 mm Ø
17 = cilindar, PVC 78mmØ / cylinder PVC 78 mm Ø

Veza / Connection

PO = Kutija od poliestera / Polyester box
AA = Kutija od aluminijuma / Aluminum box
ST = trostruki ili šestostruki adapter / Triple- or sixfold adaptor
LY = ___ mm = kabl LiYY (standardni 1000mm)
___ mm = cable LiYY (standard 1000 mm)
SI = ___ mm = kabl Silikon (standardni 1000mm)
___ mm = cable Silicone (standard 1000 mm)

Vidite kljuc tipa u odeljku 06-00-02E
see type key on folder 06-00-02E

T208

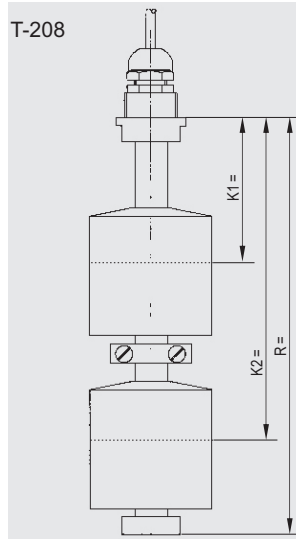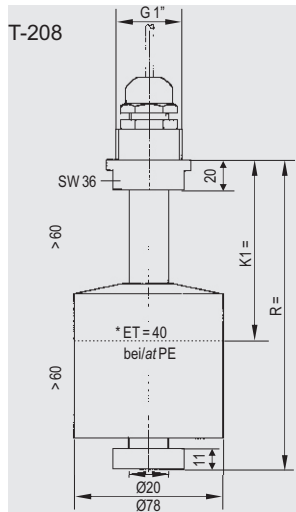

*Dubina uranjanj pri gustini 1
Immersion depth at density 1

Bdimenzije u mm / Dimensioning in mm



T-208

TAUCHSONDEN • IMMERSIBLE PROBES

